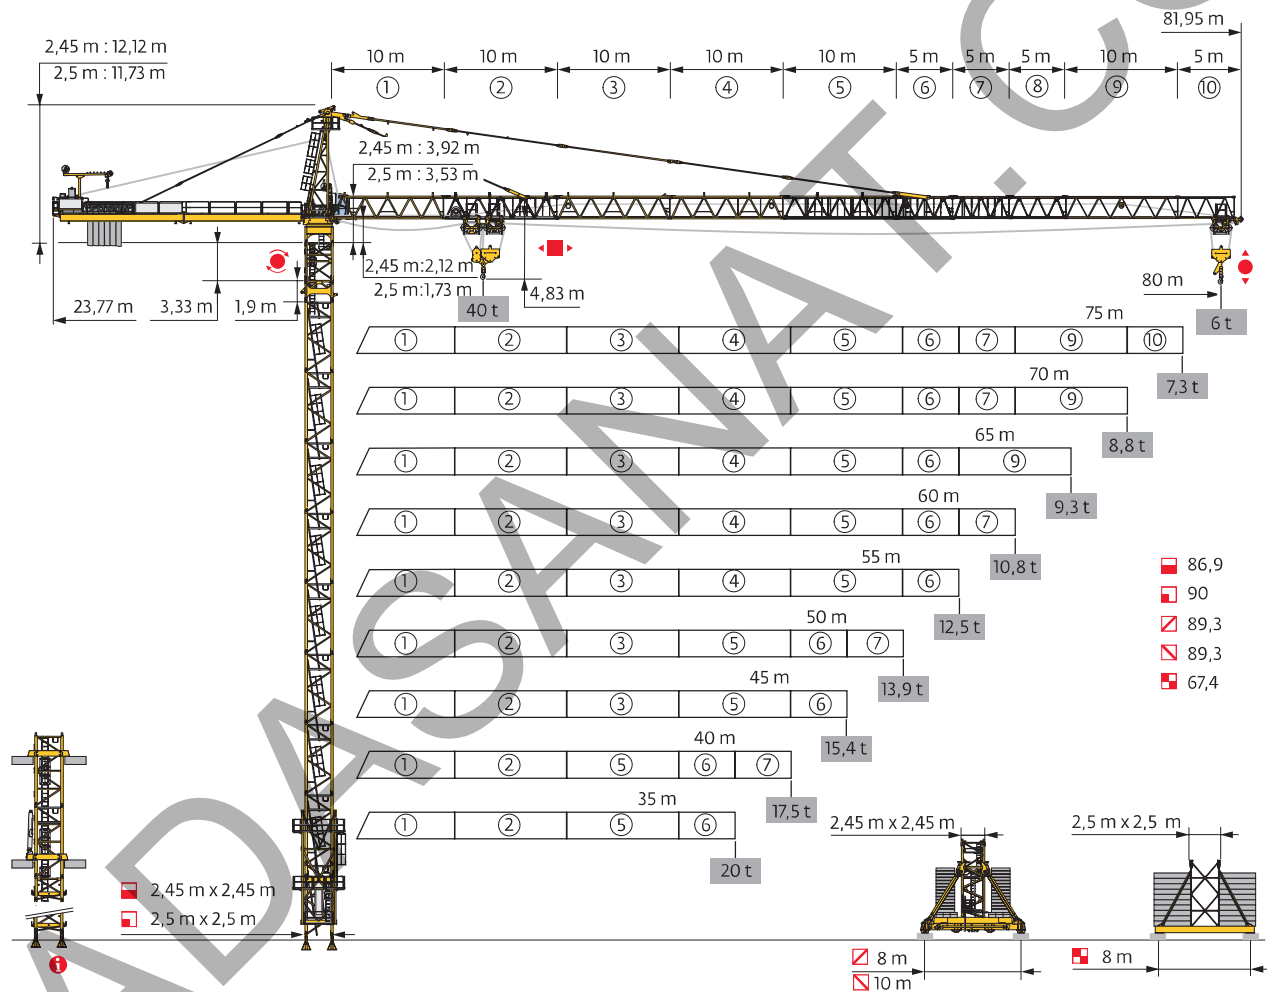


MD 689 M40



Potain Plus



Power Control

Top Site

Top Tracing 3

CabLIFT

TCL




Mât - Réactions / Mast - Reaktionskräfte / Mast - Reactions / Mástil - Reacciones / Torre - Reazioni
Tramo - Reacções / Реакция опор мачты

2,45 m - P 850A										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
↑ (m)	83,6	85,2	86,9	85,2	83,6	83,6	83,6	78,6	85,2	81,9
↑/P ₊ (m)	81,9	81,9	80,2	81,9	78,6	78,6	78,6	78,6	81,9	78,6
3,33 m	1	1	1	1	1	1	1	1	1	1
1,9 m	1	1	1	1	1	1	1	1	1	1
3,33 m	0	2	1	2	0	0	0	0	2	1
5 m	16	15	16	15	16	16	16	15	15	15
F2 (t)	● 341	343	346	340	342	342	337	339	347	344
	■ 418	440	456	439	419	426	421	375	454	445
F3 (t)	● 235	232	233	226	224	223	217	220	221	220
	■ 331	350	364	344	322	328	322	275	349	341

2,45 m - YM 850 -										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
↑ (m)	86	87,7	89,3	89,3	86	86	87,7	81	89,3	84,3
↑/P ₊ (m)	84,3	84,3	82,7	82,7	81	81	81	81	86	81
3,33 m	1	1	1	1	1	1	1	1	1	1
1,9 m	1	1	1	1	1	1	1	1	1	1
3,33 m	1	0	2	2	1	1	0	1	2	2
5 m	14	15	14	14	14	14	15	13	14	13
F1 (t)	● 192	193	201	199	190	190	194	178	206	196
	■ 238	245	259	257	236	239	244	208	262	248

2,45 m - JM 850 -										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
↑ (m)	86	87,7	89,3	89,3	86	86	87,7	81	89,3	84,3
↑/P ₊ (m)	84,3	84,3	82,7	82,7	81	81	81	81	86	81
3,33 m	1	1	1	1	1	1	1	1	1	1
1,9 m	1	1	1	1	1	1	1	1	1	1
3,33 m	1	0	2	2	1	1	0	1	2	2
5 m	14	15	14	14	14	14	15	13	14	13
F1 (t)	● 154	156	161	162	153	156	157	147	168	159
	■ 190	195	206	204	188	191	195	166	209	198

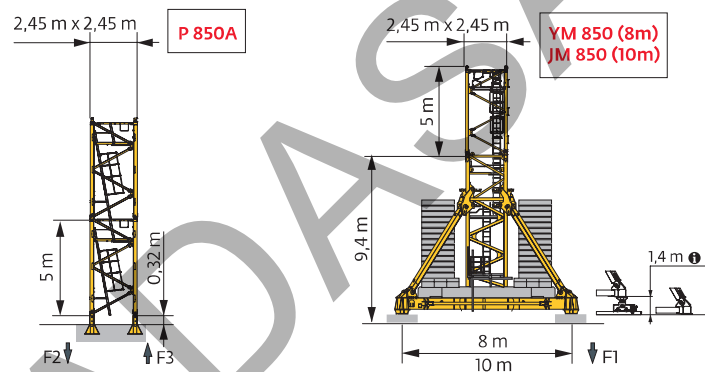


i Accès motorisés types CabLIFT et TCL : compositions de mâture, de lest de base et réactions adaptées. / Motorisierter Zugang vom Typ CabLIFT und TCL: Mastzusammensetzung, Grundballast und Reaktionskräfte sind angepasst. / Motorized accesses of CabLIFT and TCL types: Adapted mast composition, base ballast and reactions. / Acceso a cabina con elevador tipo CabLIFT (interno) y tipo TCL (externo): Adaptación de composición de mástil, lastre de base y reacciones. / Accessi motorizzati di tipo CabLIFT e TCL: composizioni elementi torre, zavorre di base e reazioni aggiornate. / Acessos motorizados tipo CabLIFT e TCL: composições de coluna, lastro da base e reacções adaptadas. / Лифты CabLIFT и TCL для подъема крановщиков: адаптированная композиция мачты, базовый балласт и нагрузки.



2,5 m - P 80A										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
Δ (m)	61,1	61,1	66,9	66,9	61,1	61,1	61,1	55,3	61,1	55,3
Δ/P ₊ (m)	-	-	-	-	-	-	55,3	-	61,1	-
11,2 m	1	1	1	1	1	1	1	1	1	1
5,78 m	9	9	10	10	9	9	9	8	9	8
F2 (t)	● 231 ■ 143	226 148	235 150	234 156	232 155	232 151	228 157	232 155	234 154	228 129
F3 (t)	● 146 ■ 79	140 81	145 80	141 83	137 80	135 75	130 79	134 77	132 73	128 48

2,5 m - P 81A										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
Δ (m)	90	90	84,2	84,2	84,2	84,2	84,2	84,2	84,2	78,4
Δ/P ₊ (m)	-	-	-	-	-	-	84,2	-	84,2	-
11,2 m	1	1	1	1	1	1	1	1	1	1
5,78 m	14	14	13	13	13	13	13	13	13	12
F2 (t)	● 298 ■ 298	293 292	271 246	270 243	279 253	279 258	290 262	292 267	287 263	275 249
F3 (t)	● 196 ■ 215	190 208	171 166	167 161	171 164	169 168	177 170	177 171	172 168	163 157

2,5 m - Y 80A - 										
ΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
Δ (m)	61,6	67,4	67,4	67,4	61,6	61,6	67,4	61,6	55,8	50
Δ/P ₊ (m)	-	-	-	-	-	-	61,6	-	55,8	-
11,2 m	1	1	1	1	1	1	1	1	1	1
5,78 m	8	9	9	9	8	8	9	8	7	6
F1 (t)	● 128 ■ 94	132 97	129 95	132 100	132 101	133 100	136 103	137 103	131 102	129 93

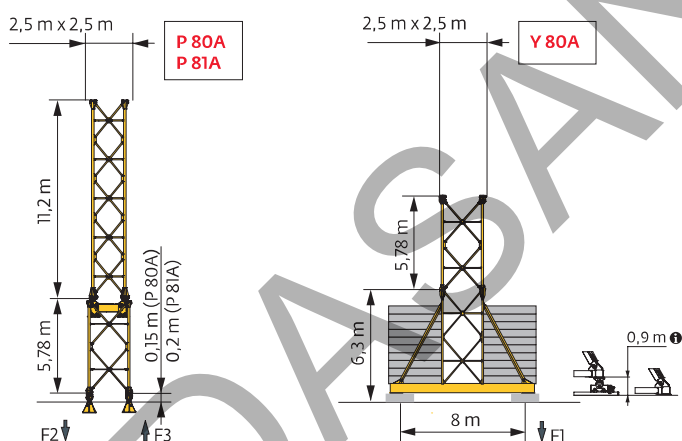

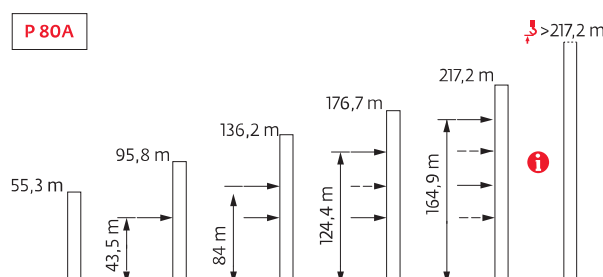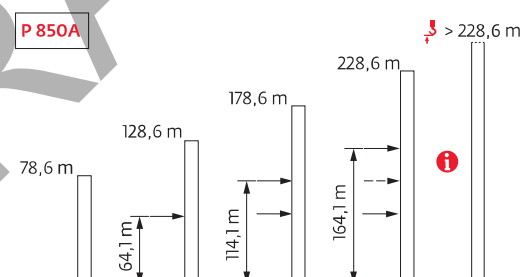Ancrages / Verankerungen / Anchorages / Anclajes / Ancoraggi
Ancoragem / нкера



Lest de base / Grundballast / Base ballast / Lastre de base / Zavorra di base
 Lastro da base / Базовый Балласт

⚖ (t) / 2,45 m - YM 850 - ⚖										
⚖ (m)	35	40	45	50	55	60	65	70	75	80
89,3			204	192					192	
87,7		180	180	168			168		168	
86	180	168	168	156	156	156	156		156	
84,3	168	156	156	144	144	144	132		144	168
82,7	144	144	144	132	120	120	120		120	144
81	132	132	132	120	120	120	108	108	108	132
76	108	96	96	96	96	96	96	96	72	96
71	84	84	84	84	84	72	72	72	72	84
66	72	72	72	72	72	60	60	72	72	72
61	72	72	72	60	60	60	60	72	72	72
56	60	60	60	60	60	60	60	72	72	72
51	60	60	60	60	60	60	60	60	72	72
46	60	60	60	60	60	60	60	60	60	72
41	60	60	60	60	60	60	60	60	60	72
36	60	60	60	60	60	60	60	60	60	60
31	60	60	60	60	60	60	60	60	60	60
26	60	60	60	60	60	60	60	60	60	60
21	60	60	60	60	60	60	60	60	60	60

⚖ (t) / 2,45 m - JM 850 - ⚖										
⚖ (m)	35	40	45	50	55	60	65	70	75	80
89,3			108	108					108	
87,7		96	96	96			84		84	
86	96	96	84	84	72	84	72		72	
84,3	84	84	84	72	60	72	60		60	84
82,7	72	72	72	60	48	48	48		48	72
81	72	60	60	48	48	48	48	48	48	60
76	48	48	48	48	48	48	48	48	48	48
71	48	48	48	48	48	48	48	48	48	48
66	48	48	48	48	48	48	48	48	48	48
61	48	48	48	48	48	48	48	48	48	48
56	48	48	48	48	48	48	48	48	48	48
51	48	48	48	48	48	48	48	48	48	48
46	48	48	48	48	48	48	48	48	48	48
41	48	48	48	48	48	48	48	48	48	48
36	48	48	48	48	48	48	48	48	48	48
31	48	48	48	48	48	48	48	48	48	48
26	48	48	48	48	48	48	48	48	48	48
21	48	48	48	48	48	48	48	48	48	48

⚖ (t) / 2,5 m - Y 80A - ⚖										
⚖ (m)	35	40	45	50	55	60	65	70	75	80
67,4		96	84	96			96			
61,6	96	84	84	84	96	96	96	96		
55,8	96	84	84	84	96	96	96	96	96	
50	84	72	84	84	84	96	96	96	96	96
44,3	84	72	72	84	84	84	84	96	96	96
38,5	84	72	72	72	84	84	84	84	84	96
32,7	84	72	72	72	84	84	84	84	84	84
26,9	84	72	72	72	72	84	84	84	84	84


Courbes de charges / Lastkurven / Load curves / Curvas de cargas / Curve di carico / Curvas de carga / Кривые нагрузок



			12	15	22	25	30	35	37	40	45	47	50	55	57	60	65	67	70	72	75	77	80	m
80	3,9 → 15,5	27,1 - 29,6	40	40	26,1	22,2	19,7	16,4	15,3	13,9	12,1	11,4	10,6	9,3	8,9	8,3	7,4	7,1	6,7	6,4	6	5,7	5,4	t
	3,9 → 16	28,5 - 31,2	40	40	27,5	23,6	20	17,5	16,4	15	13,1	12,4	11,5	10,2	9,8	9,2	8,2	7,9	7,4	7,1	6,7	6,4	6	t P ₊
75	3,9 → 16,2	26,8 - 28,6	40	40	26,4	22,1	18,8	15,2	14,1	12,6	11,3	10,9	10,3	9,4	9,1	8,7	7,9	7,6	7,2	7	6,6	t		
	3,9 → 17,2	28,5 - 30,7	40	40	29	24,3	20	16,6	15,3	13,9	12,3	11,9	11,3	10,4	10	9,6	8,7	8,4	7,9	7,6	7,3	t	P ₊	
70	3,9 → 18,3	29,8 - 31,1	40	40	30,9	25,8	20	17,5	16,4	15	13	12,3	11,5	10,6	10,2	9,7	8,9	8,5	8	t				
	3,9 → 18,4	31,7 - 32,5	40	40	32,9	28,4	21,8	18	16,7	15,2	13,6	13,1	12,6	11,7	11,3	10,7	9,8	9,4	8,8	t	P ₊			
65	3,9 → 17,5	30,5 - 32,7	40	40	30,2	25,8	20,5	18,5	17,3	15,7	13,6	12,9	11,9	10,5	10,1	9,4	8,5	t						
	3,9 → 18,4	32,9 - 34,4	40	40	33,1	28,4	22,5	19,5	18,2	16,6	14,8	14,1	13,1	11,6	11,1	10,3	9,3	t	P ₊					
60	3,9 → 17,4	30,9 - 33,2	40	40	30,3	26	20,8	18,8	17,6	16,1	14	13,3	12,3	10,9	10,5	9,8	t							
	3,9 → 18,1	33,4 - 35,1	40	40	32,5	28,1	22,7	20	18,6	17	15,1	14,6	13,5	12	11,5	10,8	t	P ₊						
55	3,9 → 17,8	32,1 - 34,5	40	40	31,4	27	21,7	19,7	18,5	16,9	14,7	14	13	11,6	t									
	3,9 → 18,5	34,1 - 36,3	40	40	33,1	28,7	23,2	20	19,6	18	15,7	15	14	12,5	t	P ₊								
50	3,9 → 17,6	32 - 34,5	40	40	31	26,8	21,6	19,7	18,5	16,9	14,8	14,1	13,1	t										
	3,9 → 18,5	34,1 - 36,3	40	40	33,1	28,6	23,2	20	19,6	17,9	15,7	15	13,9	t	P ₊									
45	3,9 → 17,4	31,6 - 34,1	40	40	30,6	26,4	21,3	19,4	18,2	16,7	14,6	t												
	3,9 → 18,2	33,6 - 35,7	40	40	32,5	28,1	22,8	20	19,2	17,6	15,4	t	P ₊											
40	3,9 → 17,6	32 - 34,4	40	40	31	26,7	21,6	19,6	18,5	16,9	t													
	3,9 → 18,2	33,5 - 35,6	40	40	32,3	28	22,7	20	19,1	17,5	t	P ₊												
35	3,9 → 17,7	32,5 - 35	40	40	31,4	27,1	22	20	t															
	3,9 → 18	33,1 - 35	40	40	31,9	27,6	22,4	20	t	P ₊														

Poids de flèche & lest de contre-flèche / Auslegergewicht & Gegenauslegerballast / Jib weight & counter-jib ballast / Peso de flecha y lastre de contra-flecha / Peso del braccio & zavorra di contro-braccio / Peso da lança & lastro da contra-lança / Вес стрелы и балласт контр-стрелы

		(kg) (+/- 5%)			
			6000 kg	4000 kg	(kg)
80 m	28760	6	0	36000	
75 m	27755	6	0	36000	
70 m	27205	5	1	34000	
65 m	26080	5	0	30000	
60 m	25810	4	1	28000	
55 m	24685	3	2	26000	
50 m	23040	2	2	20000	
45 m	21920	2	1	16000	
40 m	20030	1	2	14000	
35 m	18910	1	1	10000	

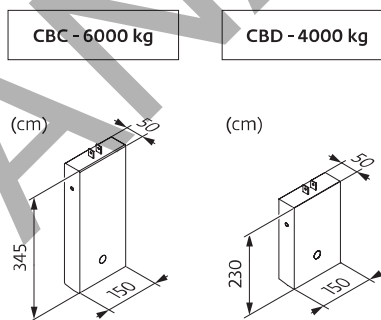














Encombrement et poids / Abmessungen und Gewicht / Dimensions and weight / Dimensiones y peso / Ingombro e peso
dimensões e pesos / габаритные размеры и вес

Partie tournante / Drehender Kranteil / Slewing crane part / Parte giratoria

Parte rotante / Parte rotativa / Поворотная часть : 80 m - 270/320 LVF



Partie tournante / Drehender Kranteil / Slewing crane part Parte giratoria / Parte rotante / Parte rotativa Поворотная часть		L (m)	I (m)	h (m)	kg (+/- 5%)
Contre-flèche / Gegenausleger Counter-jib / Contra-flecha Controbraccio / Contra-lança Контр-стрела		11,7	4,7	1,96	6600
		11,04	3,74	2,07	4925
Porte-flèche / Auslegerträger Cathead / Porta-flecha Cuspide / Suporte de lança Оголовок		3,54	1,99	9,86	8265
Cabine / Kabine Cab / Cabina Cabina / Cabina Кабина		5	2,5	2,77	1875
Pivot / Krankopf Towerhead / Pivote Portaralla / Pivot Секция поворотной части		3,7 3,92	2,9 3,05	3,87 3,51	11560 11500
Treuil de levage (+ câble) / Hubwerk (+ Seil) Hoisting winch (+ rope) / Mecanismo de elevación (+ cabo) Argano di sollevamento (+ fune) Guincho de elevação (+ cabo) Подъемная лебедка (+ канатом)		5,09	2,3	2,24	9885
Châssis intermédiaire de treuil / Zwischenrahmen des Triebwerks Intermediate winch frame / Chassis intermedio del mecanismo Chassis intermedio / Chassis intermédio do guincho средняя часть рамы лебедки		3,26	2,89	1,66	5663
Elément de flèche / Auslegerelement Jib section / Elemento de flecha Elemento di braccio / Elemento de lança Секция стрелы		① 10,36	1,9	2,54	5100
		② 10,33	1,9	2,34	5415
		③ 10,23	1,9	2,4	3010
		④ 10,23	1,9	2,33	2770
		⑤ 10,23	1,9	2,32	2850
Elément de flèche / Auslegerelement Jib section / Elemento de flecha Elemento di braccio / Elemento de lança Секция стрелы		⑥ 5,32	1,9	2,25	1915
		⑦ 5,24	1,9	2,04	1125
		⑧ 5,24	1,9	2,04	1005
		⑩ 5,18	1,9	1,97	550
Chariot / Laufkatze Trolley / Carrello Carro / Carro-distribuidor Тележка		3,95	2,19	1,67	1420
Moufle / Hubflasche Pulley block / Aparejo Bozzello / Cadernal Полиспаст		2,47	0,36	2,88	1837

Pyłõne / Kranturm / Crane tower Mástil / Torre / Torre Башня крана		L (m)	I (m)	h (m)	kg (+/- 5%)	
Cage de télescopage / Teleskopwagen Telescopic cage / Jaula de telescopaje Gabbia di telescopaggio / Gaiola de telescopagem для телескопирования крана		2,45 m	4,62	5,79	10,23	13245
K 850/K 850 Mât de télescopage / Teleskopiermast Telescoping mast / Tramo de telescopaje Elemento di telescopaggio / Tramo de Telescopagem Мачта для телескопирования		2,45 m	2,22	3,25	2,5	3660
Cage de télescopage / Teleskopwagen Telescopic cage / Jaula de telescopaje Gabbia di telescopaggio / Gaiola de telescopagem для телескопирования крана		2,5 m	7,4	3,66	5,83	6200
Coulisse / Gleitstück Slider / Corredera Scorrimonto / Tramo interior de telescopagem выдвижная мачта		2,5 m	11,08	2,1	2,1	7100
Bas de coulisse / Gleitstückunterteil Slider base / Parte baja de corredera Parte inferiore di scorrimonto Base do tramo interior de telescopagem основание выдвижной мачты		2,5 m	2,35	1,58	2,35	5960
KM 850.10B KMT 850.10A KMT 850.10C		2,45 m	10,32 5,32 3,65	2,48 2,54 2,54	2,53 2,51 2,51	10070 5450 4230
R 86 R 87 R 87B R 88B		2,5 m	6,4 6,4 6,4 6,4	2,9 2,9 2,9 2,97	2,9 2,9 2,9 2,97	3820 4260 4525 5800
Pieds de scellement / Verankerungsfüße Fixing angles / Pie de empotramiento Montante da annegare / Angulos fixadores анкера		P 850A P 80A P 81A	0,9 0,8 -	0,9 0,8 -	1,49 1,21 -	835 1970 -
Mât-châssis / Grundmasteinheit Basic mast unit / Tramo-chasis Elemento base / Tramo-chassis Мачта для крепления к шасси		Y 80A	6	3	3	7400
Haubans / Mastabstützungen / Struts / Tornapuntas Puntoni / Escoras / Растяжка		Y 80A	5,48	0,42	0,37	800
1/2 Longeron / 1/2 Längsträger / 1/2 Side member / 1/2 Larguero 1/2 Longherone / 1/2 Longarina / 1/2 боковина		Y 80A	5,62	1,17	0,6	1000
Longeron / Längsträger / Side member / Larguero Longherone / Longarina / боковина		Y 80A	11,86	1,17	0,6	2100
Support lest / Ballastträger / Ballast support / Soporte de lastre Supporto zavorra / Suporte de lastro / Опора балласта		Y 80A	4,65	0,32	0,66	270
Traverse de châssis / Unterwagentraverse Chassis beam / Traviesa chasis Traversa carro / Travessa chassis балка шасси		Y 80A	8,6	0,7	1,15	2000
Croix centrale (position transport) / Zentralkreuz (Transport- position) / Central cross (transport position) / Braço central (posición transporte) / Croce centrale (posizione di trasporto) Braço central chassis (posição transporte) / крестообразное основание (транспортное положение)		YM 850 JM 850	5,2	1,7	1,5	6700
Mât-châssis / Grundmasteinheit Basic mast unit / Tramo-chasis Elemento base / Tramo-chassis Мачта для крепления к шасси		YM 850 JM 850	8,75	2,5	2,5	14600
Bras de châssis / Unterwagenträger / Chassis girder / Braço de base en cruz / Traverse del carro / Braço de chassis / опорная балка шасси		YM 850 JM 850	3,8 5,2	0,9 0,9	1,55 1,55	2800 3200
Tirant de châssis / Unterwagenstreben / Chassis ties / Tirante de base en cruz / Tiranti del carro / Tirante de chassis / тяга крепления шасси		YM 850 JM 850	7,2	0,25	0,35	250
Haubans / Mastabstützungen Struts / Tornapuntas Puntoni / Escoras Растяжка		YM 850 JM 850	7,5 8,2	0,75 0,75	1,3 1,3	2100 2300

Mécanismes / Triebwerke / Mechanisms / Mecanismos / Meccanismi
Mecanismos / Механизмы

400 V - 50 Hz 480 V - 60 Hz														ch - PS hp	kW		
	400 V - 50 Hz	270 LVF 100 Optima	m/min	51	66,5	96	139	162	25,5	33,5	49	71	81	270	200	532 m	
	480 V - 60 Hz	320 LVF 100 Optima	t	20	15	10	5	3,5	40	30	20	10	8				
	480 V - 60 Hz	320 LVF 100 Optima	m/min	60	78	112	154	162	30	39	56	77	81	320	240	532 m	
			t	20	15	10	6,8	5,8	40	30	20	14,2	12,2				
	400 V - 50 Hz 480 V - 60 Hz	15 DVF 16 Optima	m/min	0 → 33 (40 t) 0 → 50 (20 t) 0 → 67 (10 t) 0 → 100 (2,5 t)											15	11	
		RVF 173 Optima+	tr/min U/min rpm	400 V - 50 Hz : 0 → 0,7 480 V - 60 Hz : 0 → 0,8											3 x 10	3 x 7,5	

IEC 60204-32	
400 V (+10% -10%) 50 Hz	257 → 149 kVA
480 V (+6% -10%) 60 Hz	297 → 169 kVA

	FR	DE	EN	ES	IT	PT	RU
	Équipements standards	Standardausrüstungen	Standard equipment	Equipamiento de serie	Equipaggiamento standard	Equipamento de série	Стандартное оборудование
	Équipements optionnels	Sonderausrüstungen	Options	Equipamiento opcional	Equipaggiamento in opzione	Equipamento opcional	Дополнительное оборудование (опция)
	Fonction Potain Plus : Courbes de charges Plus	Funktion Potain Plus: Plus-Lastkurven	Potain Plus function: Plus load curves	Función Potain Plus: Diagrama de cargas Plus	Funzione Potain Plus: Curve di carico Plus	Função Potain Plus: Diagrama de cargas Plus	Функция контроля мощности Potain Plus: Диаграммы грузоподъемности Plus
	Hauteurs sous crochet associées aux courbes de charges Plus	Hakenhöhen mit Plus-Lastkurven	Hook heights with Plus load curves	Altura bajo gancho, usando el diagrama de cargas Plus	Altezze sotto gancio con curve di carico Plus	Altura livre, utilizando o diagrama de cargas Plus	Высота под крюком для диаграмм грузоподъемности Plus
	Réactions en service	Reaktionskräfte in Betrieb	Reactions in service	Reacciones en servicio	Reazioni in servizio	Reações em serviço	Реакция при работе
	Réactions hors service	Reaktionskräfte außer Betrieb	Reactions out of service	Reacciones fuera de servicio	Reazioni fuori servizio	Reações fora de serviço	Реакция в покое
	Poids total du lest	Ballast-Gesamtgewicht	Total ballast weight	Peso total del lastre	Peso totale della zavorra	Peso total do lastro	Общий вес балласта
	Cadre d'ancrage serré	Fester Verankerungsrahmen	Tightened anchorage frame	Marco de anclaje de apriete	Quadro di ancoraggio stretto	Quadro de amarração apertado	Прикрепленная анкерная рама
	Cadre d'ancrage desserré	Loser Verankerungsrahmen	Loosened anchorage frame	Marco de anclaje de desapriete	Quadro di ancoraggio allentato	Quadro de amarração solto	Отсоединенная анкерная рама
	Poids de flèche	Auslegergewicht	Jib weight	Peso de flecha	Peso del braccio	Peso da lança	вес стрелы
	Camion 13,4 m	Lkw 13,4 m	Lorry 13,4 m	Camión 13,4 m	Camion 13,4 m	Camião 13,4 m	Резусовой автомобиль 13,4 м
	Conteneur High Cube 40', et/ou Flat Rack 20'	Container High Cube 40', und/oder Flat Rack 20'	Container High Cube 40', and/or Flat Rack 20'	Contenedor High Cube 40', y/o Flat Rack 20'	Container High Cube 40', e/o Flat Rack 20'	Contendor High Cube 40', e/ou Flat Rack 20'	40-футовый контейнер повышенной вместимости High Cube, и/или 20-футовая открытая платформа Flat Rack
	Levage	Heben	Hoisting	Elevación	Sollevamento	Elevação	Подъем
	Distribution	Katzenfahren	Trolleying	Distribución	Distribuzione	Distribuição	Перемещение по стреле
	Orientation	Schwenken	Slewing	Orientación	Rotazione	Rotação	Поворот
	Translation	Kranfahren	Travelling	Traslación	Traslazione	Translação	Перемещение крана
	Puissance requise	Erforderliche Leistung	Required power	Potencia Necesaria	Potenza richiesta	Potência Necessária	Потребляемая мощность
	Fonction Power Control : vitesses treuils adaptées à la puissance disponible	Funktion Power Control: Geschwindigkeiten an die verfügbare Leistung angepasst	Power Control Function: winch speeds adapted to the available power	Función Power Control: marchas de los cabrestantes adaptadas a la potencia disponible	Funzione Power Control: velocità degli argani adattate alla potenza disponibile	Função Power Control: velocidades de guincho adaptadas à potência disponível	Функция контроля мощности Power Control: регулировка скорости лебедок в зависимости от доступной мощности
	Nous consulter	Auf Anfrage	Consult us	Consultarnos	Consultateci	Consultar-nos	Проконсультируйтесь у нас
	Document commercial non contractuel. Pour toute information technique se référer à la notice correspondante.	Unverbindliches Vertriebsdokument. Für technische Informationen, siehe die entsprechenden Anweisungen.	This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.	Documento comercial no contractual. Para cualquier información técnica, ver la noticia correspondiente.	Documento commerciale non vincolante, per tutte le informazioni tecniche fare riferimento al catalogo istruzioni.	Documento comercial não contratual. Para qualquer informação técnica complementar consultar as respectivas instruções.	Этот коммерческий документ не является юридически обязательным. Для получения технической информации, см. соответствующие инструкции.



© 2016 The Manitowoc Company, Inc.
www.manitowoc.com